

# CROWN<sup>®</sup>

SERIES

TOTALLY DIFFERENT.



## C043

### Continuous Dispensing Custard Freezer

#### Features

Offer premium frozen custard, low overrun ice cream, or sorbet in three separate flavors.

#### Mix Hopper

Three, 30 quart (28.4 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C).

#### Indicator Lights

Lights indicate when mix is low in the hopper.

#### Product Chute

Ribbon of frozen product flows down chute to separate dipping cabinet. Easily removable for cleaning or moving dipping cabinet.

#### Mix Flow Regulator

Convenient dials with easy to read markings allow operator to adjust the correct amount of mix flowing into freezing cylinder for proper consistency.

#### Safety Features

To protect users from accidental injury:

- Beater motor will not rotate unless door is in place.
- Finger guards installed in opening of dispensing door.




Rockton, Illinois 61072  
**800-255-0626**  
Phone 815-624-8333 Fax 815-624-8000  
**www.taylor-company.com**  
e-mail: info@taylor-company.com

International Office  
Taylor Company S.r.l.  
Roma, Italy  
Tel: **+39-06-420-12002** Fax: +39-06-420-12034  
e-mail: romeoff@taylor-company.com

ISO 9001:2008  
Registered Firm

# C043 Continuous Dispensing Custard Freezer

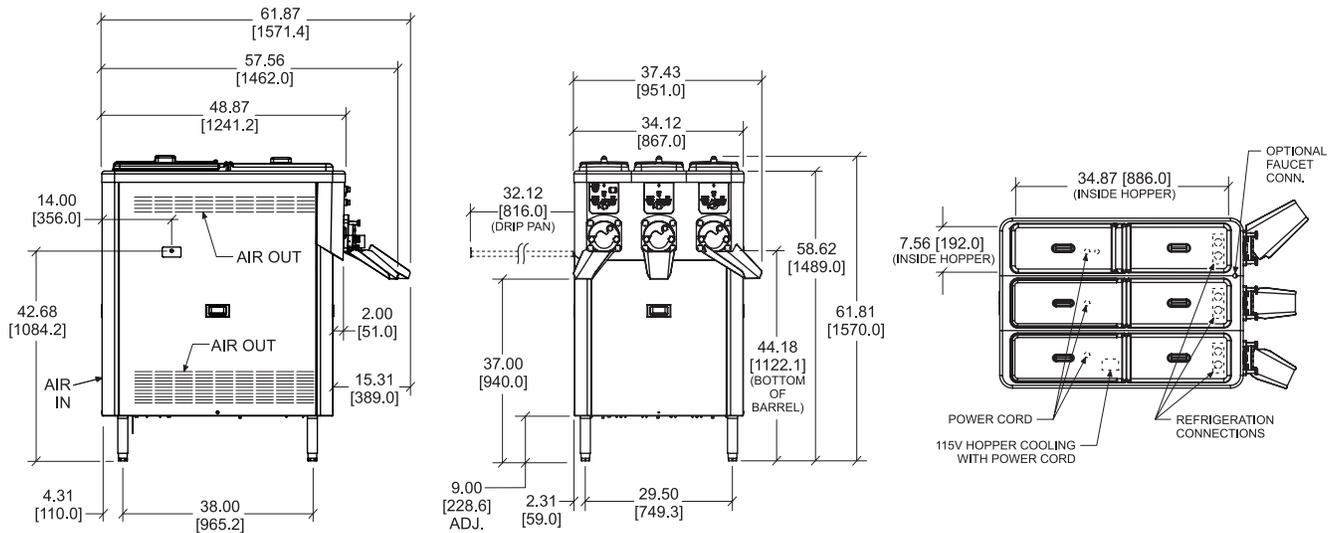

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL AND FRACTIONAL DIMENSIONS EQUAL TO ( PLUS OR MINUS 1/16 INCH [1.5mm] ).

TOP VIEW - OPERATOR END  
ALL CONNECTIONS LOCATED UNDERSIDE OF BASE

Weights	lbs.	kgs.
Net	953	427.7
Crated	1091	494.9
	cu. ft.	cu. m.
Volume	484.4	2.80
Dimensions	in.	mm.
Width	34-1/8	867
Depth	48-7/8	1242
Height	61-13/16	1570
Clearance	9 Adjustable	229

\*Mounted on standard legs

Electrical	Maximum	Minimum	Poles (P)
Three Dedicated	Fuse Size	Circuit Ampacity	Wires (W)
208-230/60/3 Air	20	8	3P 4W
380-415/50/3N~ Air	12	11	4P 5W
One Dedicated	Maximum	Minimum	Poles (P)
Connection	Fuse Size	Circuit Ampacity	Wires (W)
115/60/1 Air	15	7	2P 3W

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.

(For exact electrical information, always refer to the data label of the unit.)

## Specifications

### Electrical

Four dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Dispensing electrical connections may be permanently connected. Hopper cooling is cord connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

Three, 2.0 HP.

### Refrigeration System

Requires three remote condensing units (Taylor Model RC35 required for warranty coverage).

### Separate Hopper Refrigeration (SHR)

One, 1,500 BTU/hr. R404A.  
(BTUs may vary depending on compressor used.)  
Requires separate 115 volt power supply, cord connected.

### Clearance

Minimum Clearance of 3" (76 mm) on left, and 0" on right side. Allow 3 feet (914 mm) in the rear for service access.

### Options

- Dipping Cabinet (Consult your local Taylor distributor)
- Dipping Well (Consult your local Taylor distributor)
- Faucet
- Remote Condensing Systems - RC35 three (3) required

### Bidding Specs

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
Neutral: Yes No Cooling: Air Water NA

Options: \_\_\_\_\_

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,  
Rockton, Illinois 61072  
815-624-8333 800-255-0626 Fax 815-624-8000  
www.taylor-company.com