



Item No. \_\_\_\_\_

# R280

## Frozen Food Dispenser

R280



Fryer Baskets Sold Separately

### Features

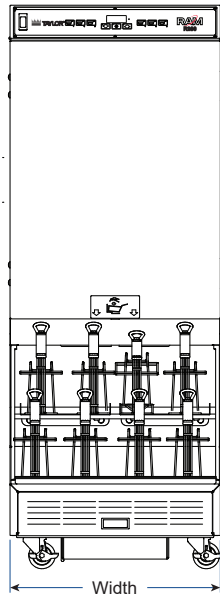
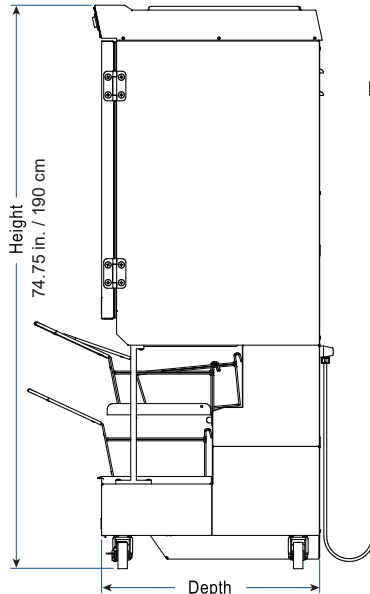
Dispenses and stores frozen fries directly into fryer basket. Ensuring that the fries are cooked from frozen, results in improved product quality, consistency and yield. Unit is designed for simple daily cleaning of cabinet and refrigeration filter. Provides storage of up to eight baskets, flexible store configuration for left or right hand door opening. Self contained environmentally friendly refrigeration system using R290 with cold wall construction.

### Dispensing

The automated dispensing system enables the operator to fill two baskets simultaneously by sliding the baskets back into the fill position. An electronic weighing system allows for a portion-controlled fill level for the basket. Unit incorporates an inductive sensor to ensure proper basket placement prior to dispensing.

### Operation

Operation of the R280 Frozen Food Dispenser is easily controlled by a power switch, dual portion control keys and a series of menu functions located on the operator control panel. The LED control display is used for calibration, and system diagnostics. The dual series of portion control keys (left-side and right-side) are used to select the desired basket load weight and will flash to indicate to the crew that the hopper is empty.

**FRONT VIEW****SIDE VIEW**

<b>Weights</b>	<b>lbs.</b>	<b>kgs.</b>
Net	409	186
Crated	472	214

	<b>lbs.</b>	<b>kgs.</b>
Hopper Capacity	60	27

<b>Dimensions</b>	<b>in.</b>	<b>cm.</b>
Width	28.5	73
Depth	32	81
Height	74.75	190

<b>Electrical</b>	<b>Total Amps</b>	<b>Poles (P) Wires (W)</b>
115/60/1 Air	8.0	5-15P
220-240/50/60/1 Air	4.6	---

Power Cord Length	8 ft.	2.43 m
-------------------	-------	--------

## Specifications

### Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

### Refrigeration System

One, R290

Note: Consult local Taylor distributor for refrigerant configurations.

### Air-Cooled

Minimum 2 in. (50 mm) rear, and 1/2 in. (12.7 mm) on both sides. Minimum air clearances must be met to ensure adequate airflow for optimum performance.

## Accessories

- Hash Brown Rack
- Fryer Basket

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

**(For exact electrical information, approval marks and refrigerant, always refer to the data label of the unit.)**

**Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.**

### Bidding Specs

**Electrical:** Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
 Neutral: Yes No **Cooling:** Air Water NA

**Options:** \_\_\_\_\_

All options may not be available in combination with others or with all electrical or cooling configurations. Please consult your local Taylor distributor.

## Authorized Taylor Distributor



750 N. Blackhawk Blvd.  
 Rockton, Illinois 61072  
[www.taylor-company.com](http://www.taylor-company.com)