



Item No. \_\_\_\_\_

C002 Freezer



# C002

## Continuous Dispensing Batch Freezer

Two Flavor

### Features

Offer premium frozen custard, low overrun ice cream, or sorbet in two separate flavors.

### Mix Hopper

Two, 20 quart (18.9 liter). Separate hopper refrigeration (SHR) maintains mix below 41°F (5°C).

### Indicator Lights

Separate lights indicate when mix is low, refrigeration on, pre-chill mode, and scraping/ejection motor on.

### Product Chute

Ribbon of frozen product flows down chute to separate dipping cabinet.

### Mix Flow Regulator

Easy to read markings allow operator to dial in the correct amount of mix flowing into freezing cylinder for proper consistency. Adjusts for operation from the front, back, or side, depending on space requirements.

750 N. Blackhawk Blvd. Rockton, Illinois 61072  
**800-255-0626**  
Phone 815-624-8333 Fax 815-624-8000  
[www.taylor-company.com](http://www.taylor-company.com)  
[info@taylor-company.com](mailto:info@taylor-company.com)

ISO 9001:2015  
Registered Firm




Standard 6



LISTED  
SA2650



Selected 50  
Hz. Models

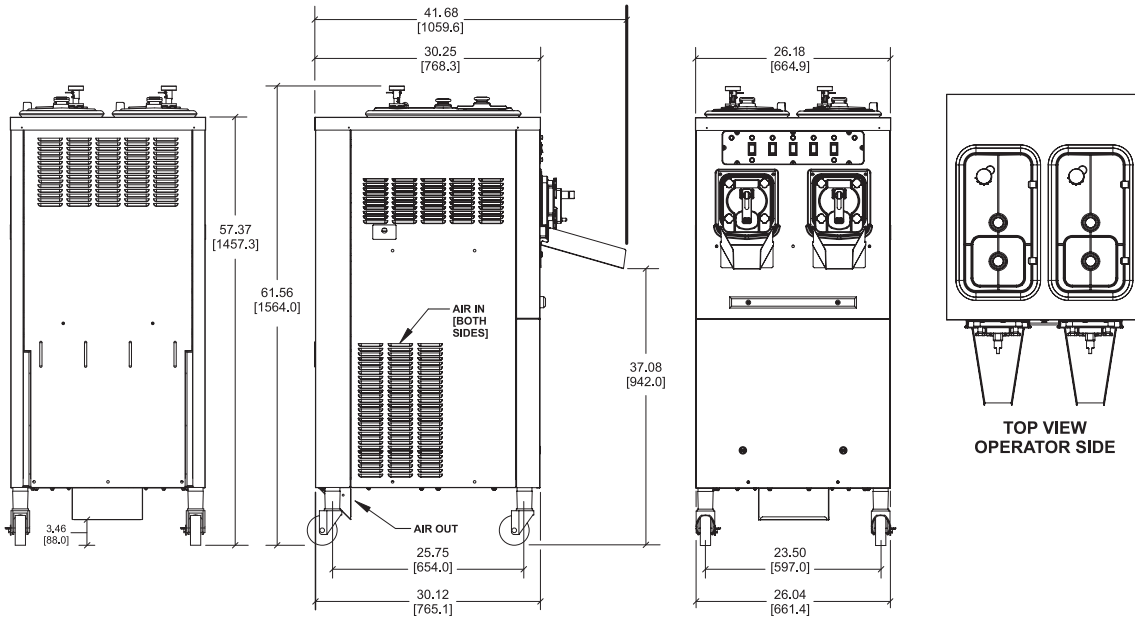

FIGURES IN BRACKETS INDICATE MILLIMETERS / DECIMAL DIMENSIONS EQUAL TO ( PLUS OR MINUS 1/16 INCH [1.5mm] ).  
DO NOT USE DRAWING FOR STORE LAYOUT.

Weights	lbs.	kgs.
Net	758	343.8
Crated	868	393.7
Volume	cu. ft.	cu. m.
Volume	67.4	1.91
Dimensions	in.	mm.
Width	26-3/16	665
Depth	41-11/16	1059
Height	61-9/16	1565
Floor Clearance	3-15/32	88

\*Mounted on standard casters

Electrical	Maximum Fuse Size		Minimum Circuit Ampacity		Poles (P) Wires (W)
	Left	Right	Left	Right	
208-230/60/1 Air	30	25	24	22	2P 3W
208-230/60/3 Air	20	20	18	16	3P 4W
208-230/60/3 Water	20	20	18	16	3P 4W
380-415/50/3N~ Air	12	10	10	8	4P 5W

This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals. Consult the local Taylor Distributor for other electrical characteristics and agency approvals based on specific electrical and country requirements.

(For exact electrical information and approval marks, always refer to the data label of the unit.)

**Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.**

**Bidding Specs**

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
Neutral: Yes No Cooling: Air Water NA

Options: \_\_\_\_\_

**Specifications**

**Electrical**

Two dedicated electrical connections are required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord and receptacle specifications as local codes allow.

**Scraping/Ejection Motor**

Two, 2.0 HP.

**Refrigeration System**

Two (2) 7,100 BTU/Hr. R-449A.  
Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134a. (BTUs may vary depending on compressor used.)

**Air Cooled**

Minimum 3" (76 mm) around all sides. Install the deflector provided to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

**Water Cooled**

Water inlet and drain connections under side of base 1/2" FPT.

**Options**

- Dipping Cabinet (Consult your local Taylor distributor)

Authorized Taylor Distributor



750 N. Blackhawk Blvd.  
Rockton, Illinois 61072  
[www.taylor-company.com](http://www.taylor-company.com)